

# Petrol Emission Reduction Treatment 250ml

JLM Petrol Emission Reduction Treatment rapidly restores the proper function of the catalytic converter and brings about an almost immediate improvement in emissions. The cleaner also cleans the entire fuel system and prevents fouling of the catalytic converter.

JLM Petrol Emission Reduction Treatment cleans the entire fuel system and prevents fouling of the catalytic converter. In contrast to most other products, it also contains a 'combustion improver' which brings about an immediate improvement in the engine combustion (even before the cleaner has actually cleaned the entire fuel system) and this is immediately reflected in lower emissions. This means that the car will pass the emissions test in the MOT test more easily, so the customer is back on the road sooner. JLM Petrol Emission Reduction Treatment is a highly concentrated cleaner that remedies and minimizes carbon deposits and contamination in cars fitted with a catalytic converter. Cleaning the fuel system, valves, pistons and injectors makes combustion more efficient, which in turn leads to lower emissions and prevents contamination of the catalytic converter.

JLM Petrol Emission Reduction Treatment is a specially developed, unique combination of additives that rapidly ensures the correct function of the catalytic converter, reduces fuel consumption and remedies power loss due to contamination. This makes JLM Petrol Emission Reduction Treatment the ideal product for the professional car mechanic to use before an emissions test (e.g. before the MOT test).


## Benefits

- Use Before Emission Test
- Reduce Emissions and Particulates
- Increase engine performance
- Increase Efficiency
- Professional Formula

## How to use:

For all petrol engines fitted with (or without) catalytic converter. Directions: Pour the contents of one bottle into the petrol fuel tank before filling it with petrol fuel. For best results try to drive at elevated RPM for some time. For fast results (e.g. when passing MOT) the product can be added to as little as 20-30 litres of petrol. For best results make sure to run engine on elevated RPM (2000-3000) for at least 20-30 minutes.

**Dosage:** One bottle treats 40-60 litres petrol fuel. For best results use one bottle every 5.000km.

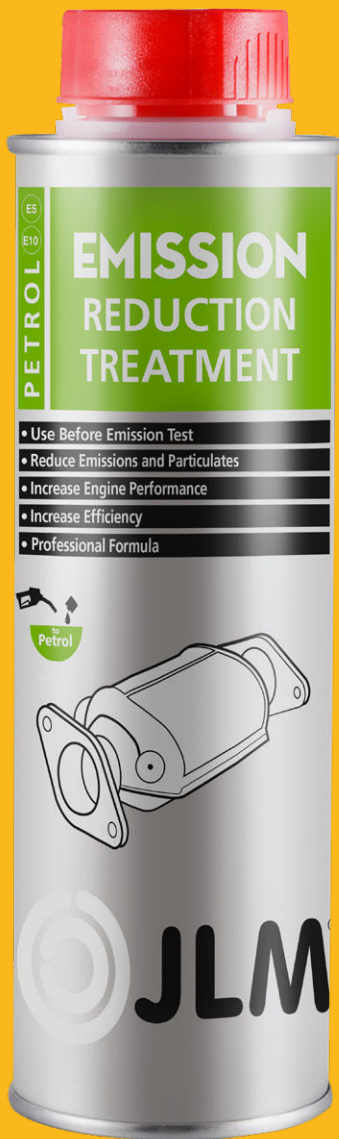

SCAN FOR MORE INFO:



**WE UNDERSTAND CARS**

[jlm Lubricants.com](http://jlm Lubricants.com)

## Product information

**Art. Nr:** J03150

**Barcode:** 8718274351460

**HS code:** 3811900000

**Ufi Code:** 4FQ8-W0NM-V00X-C42U

**Pack Siz :** 250ml

**Quantity in box:** 12

**Weight full box:** 3.2 kg

**Boiling point:** >160°C

**Flash point:** >61°C

**Density at 20 °C:** 0.8 g/cm<sup>3</sup>

**Colour:** Brown

**Odour:** Solvent

The information in this sheet is correct and true to the best of our knowledge, but any recommendations or suggestions made in this sheet are made without guarantee since the conditions of use are beyond our control. We do not accept responsibility for damage because of incompleteness, negligence and/or inaccuracies in this information sheet. The above typical values do not constitute a specification nor does the information in this sheet imply any legally binding assurance of certain properties or of suitability for a specific purpose.